

A motorised mechanism to reveal a display from the ceiling. This version hinges down by up to 100 degrees.

The size reference for this version is CHR6-RES.


The mechanism is fixed in place before the ceiling is finished. Supplied with MDF plaster edging to neatly plaster into the ceiling.

The control system can be operated via infra-red, RS232 or contact closure

Speakers can be added with the use of standard speaker mount brackets. (If required please specify during ordering process.)

See overview technical sheet for details on other products in the range.


Model Code	CHR6-RES
Max Screen Size	1530 [60.2] x 920 [36.2] x 100 [3.9]
Max Screen Weight	40kg [88lbs]
Approx Mechanism Weight	125kg [275lbs]
Environment	Residential
Colour	WHITE - RAL9910 Satin Finish
Control System	Accessible by internal access hatch
Ceiling Void Required for Fitting	2030 [79.9] W x 1412 [55.6] L x 203 [8.0] D

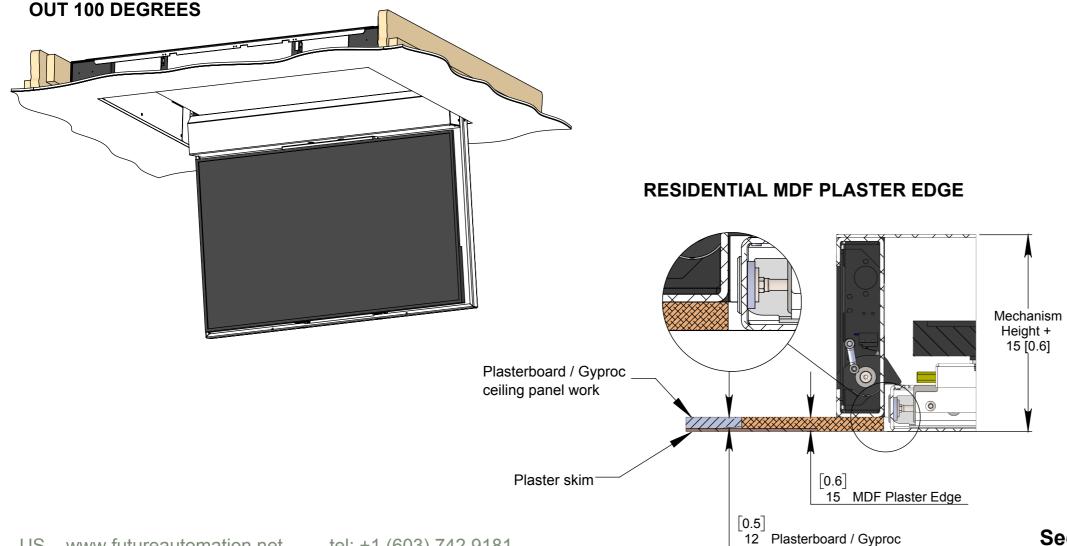




See CAD files for more dimensional information.

### **OPTION 1 - FIXING TO WOODEN BEAMS** LOAD BEARING-**Mounting Joist Width** [13.8 ±1.0] 350 ±25 79.9 0.0 2030 <sup>+5</sup> [8.9] 226

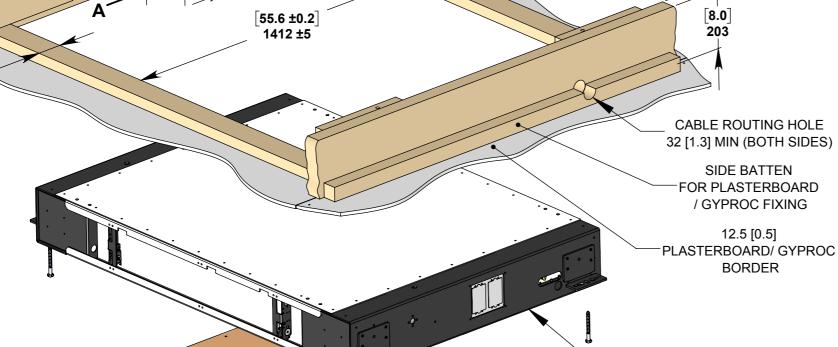


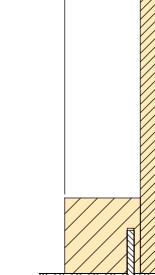


**MECHANISM** 

15 [0.6] MDF PLASTER EDGE TRIMS (SUPPLIED)

M6 x 16MM SS POZI BOLT (SUPPLIED)

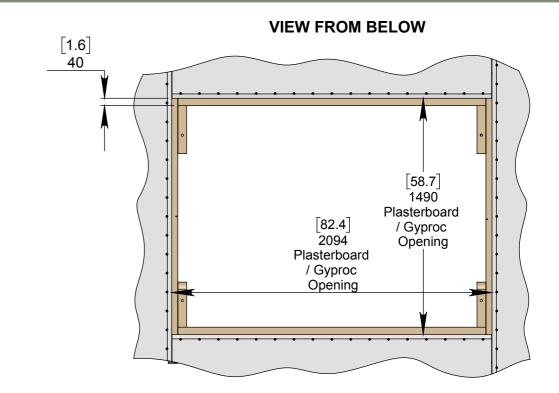


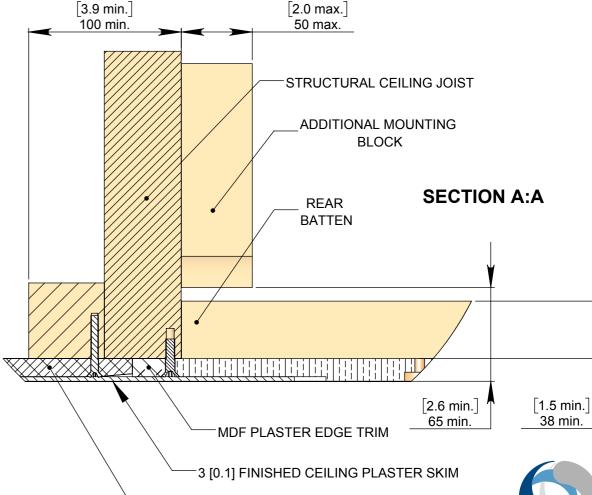


PLASTERBOARD / GYPROC

moving audio visual solutions


[3.5 min.] 89 min.

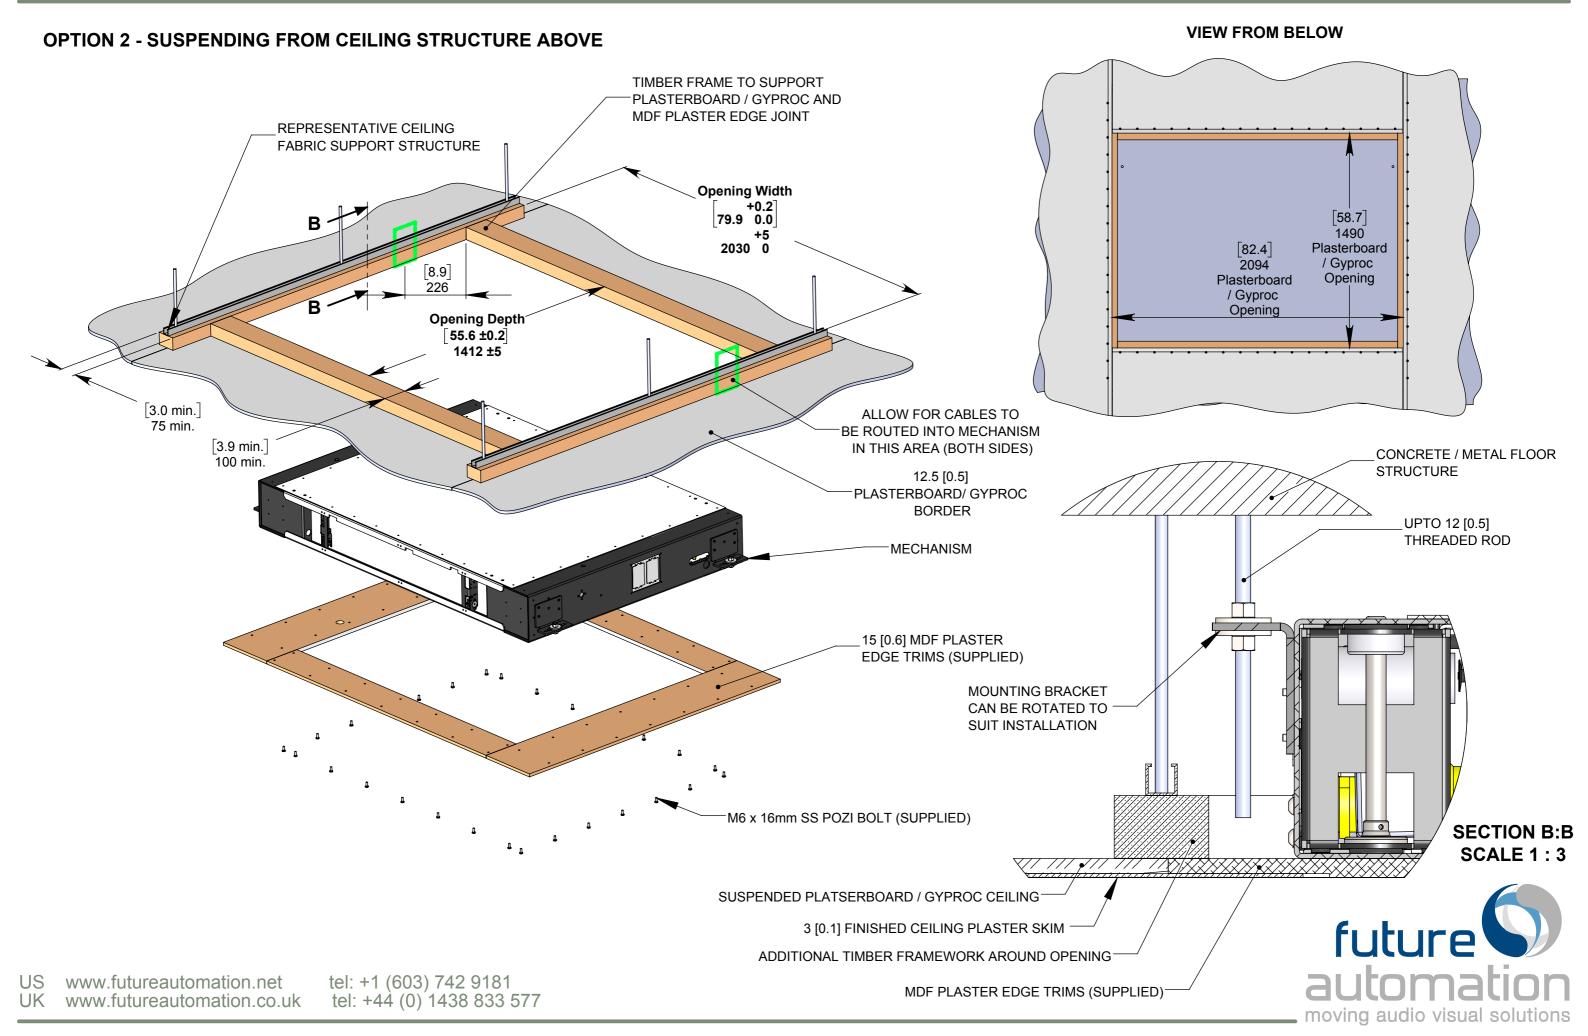

#### **INSTALLATION PROCEDURE**

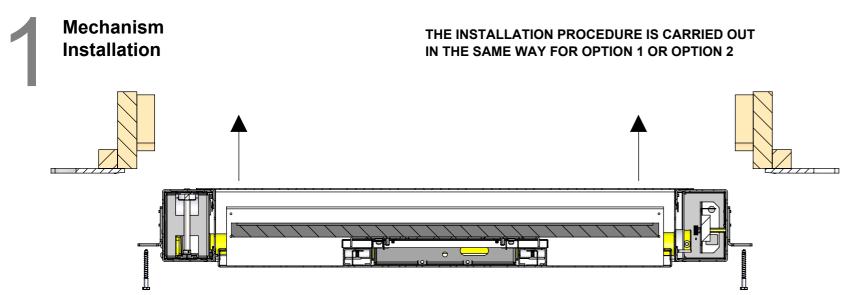


### **MDF Plaster Trim Installation**

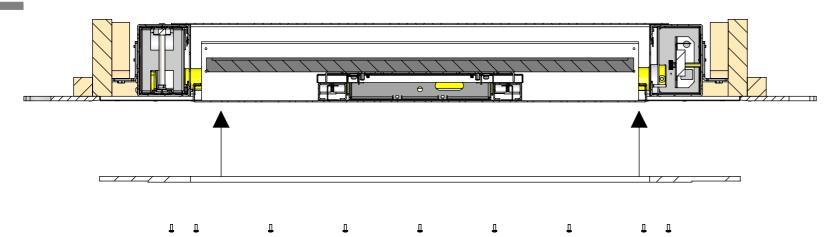

# **Plastering**

tel: +1 (603) 742 9181 tel: +44 (0) 1438 833 577

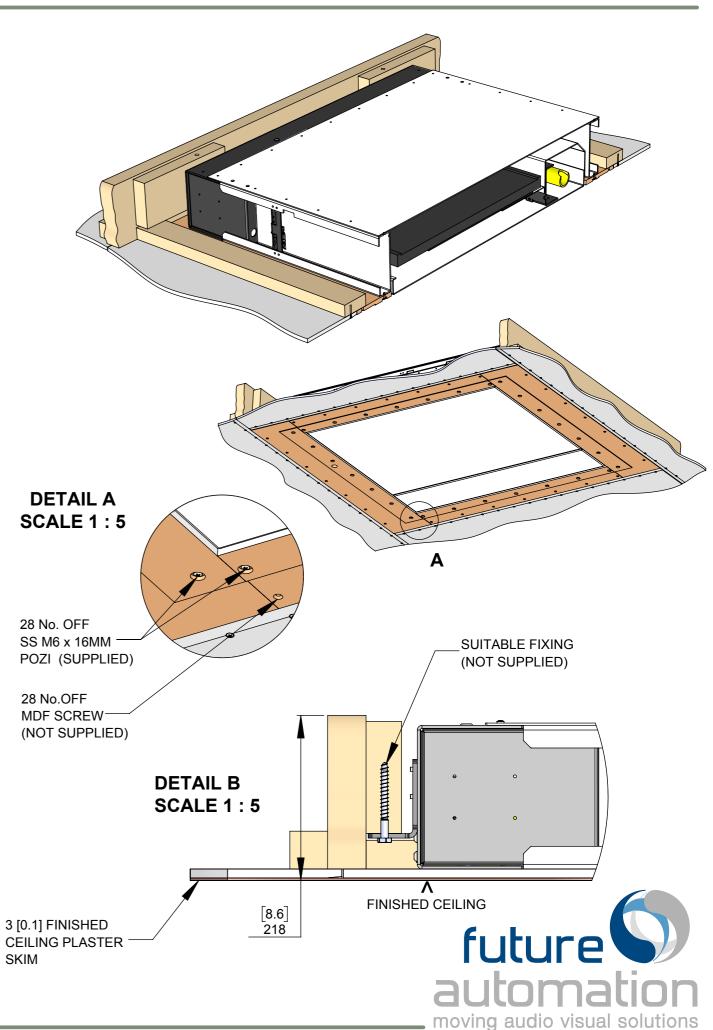

# **CEILING PREPERATION Ensure Cables can be routed** to / through ceiling joist / ceiling structure at these points into mechanism. **VIEWING SIDE UK 2G Mains** 2 No. US J-Box Plasterboard Back Box

AV Signal Cables / Mechanism Control Cables

Power Cable for Mechanism and AV


### **Cable Routing**

Cables for the screen can be routed in from both sides, allowing for power and signal cables to be separated when entering the mechanism.

The opening on both sides is MIN. 32mm [1.3"] in diameter allowing for multiple cables to be routed to the screen.

A power outlet mounting plate is supplied in the right hand gearbox allowing for UK and US power outlets to be wired directly into the mechanism.

**Ensure there are** no obstructions around the power outlet mounting plate, between the mechanism and the mounting joist / ceiling structure

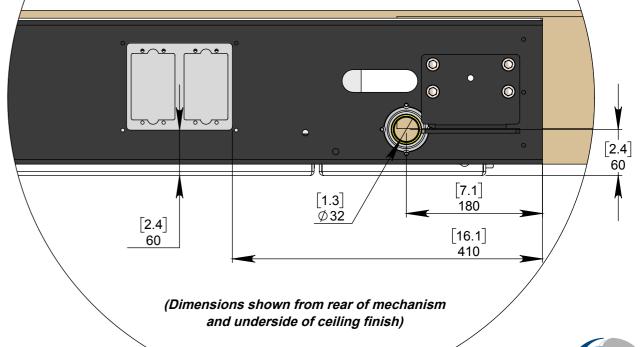

future moving audio visual solutions

## CHR6-RES Residential Ceiling Hinge

