
Technical Document
WEB 4 x 4.0mm²
Speaker Cable LSNH Black

Part Number: 231026C-LSNH
Description: WEB 4 x 4.0mm² Speaker Cable Low Smoke Non-Halogen (LSNH) Black

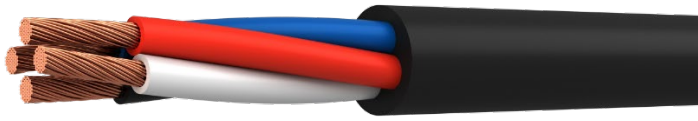

Product Construction

Conductor Material		:	99.999% Oxygen Free Plain Copper
Conductor Stranding		:	4.0mm², Class 5 to IEC 60228
Insulation Material		:	Low Smoke Non-Halogen (LSNH)
Number of Cores		:	4
Core Colours		:	Red, Blue, Black, White
Sheath Material		:	Low Smoke Non-Halogen (LSNH)
Sheath Colour		:	Black

CPR
CONSTRUCTION PRODUCTS REGULATION
EN 50575
Class Cca
s1a, d1, a1
Independently Verified

Mechanical Characteristics

Overall Diameter		:	11.5mm ± 0.2mm
Temperature Range	Fixed	:	-20°C to +70°C
	Flexing	:	0°C to +70°C
Bend Radius		:	10 x Overall Diameter
Weight		:	270 kg/km

Electrical Characteristics

Inner Conductor DC Resistance	:	≤ 4.95 Ω/km
Voltage Rating	:	300/300V

Certifications & Standards

Flame Retardancy	:	BS EN 60332-1-2, BS EN 60332-3-24C & BS EN 60332-3-22A
Low Smoke	:	BS EN 61034-2
Halogen Gas	:	BS EN 60754-1&2
RoHS 3 Compliant	:	Yes
REACH Compliant	:	Yes
UKCA CPR Classification	:	Cca s1a, d1, a1 to EN 50575:2014+A1:2016

CEDIA MEMBER

Publication Date: 09/07/2025
Revision Number: 2.0
Written by: GB
Authorised by: GB

Webro Cables & Connectors Ltd
Vision House, Meadow Brooks Business Park, Meadow Lane, Long Eaton, Nottingham NG10 2GD, UK
Tel: +44 (0)115 9724483 | Fax: +44 (0)115 9461230 | sales@webro.com | www.webro.com

This technical document and its information and images are intended for guidance only. Due to technical improvements, manufacturing changes or commercial factors the product may vary, and we reserve the right without notice or liability to amend the product information.